



## Flowfresh SRQ (1/4" - 5/16")

A decorative, slurry-broadcast and HACCP International certified antimicrobial treated cementitious urethane floor system.



### Polygiene®:

Contains a silver ion antimicrobial additive to protect the surface.



### Decorative:

Available in a wide-range of decorative quartz mixes and finishes.



### Slip Resistant:

Positively textured profile to minimize slip risks in wet or damp areas.



### Temperature Resistant:

Resistant to temperatures of up to 210°F and suitable for steam cleaning.



### Unaffected by MVT:

Allows moisture to move through the material at a safe rate.

### Standard Colors:



Spring Glen



Gray Mist



Rococo



Blueberry Ice



Kitchen Red

### COVERAGE RATES: (47 LB UNIT)

24 sq ft/unit at 3/16" (yielding 1/4" finished floor)  
18 sq ft/unit at 1/4" (yielding 5/16" finished floor)

### COMPRESSIVE STRENGTH:

ASTM C 579 8,128 psi

### TENSILE STRENGTH:

ASTM C 307 1,450 psi

### COEFFICIENT OF THERMAL EXPANSION:

ASTM C 531 1.5 x 10<sup>-5</sup>in/in/°F

### FLEXURAL STRENGTH:

ASTM C 580 2,900 psi

### ABRASION RESISTANCE:

ASTM D 4060  
CS 17 Wheel, 1000 cycles 0.05g loss

### ADHESION:

ASTM D 4541 400 psi  
(100% concrete failure)

### COEFFICIENT OF FRICTION:

ASTM D 2047 Exceeds ADA  
recommendations


### TEMPERATURE RESISTANCE: \*

Continuous Exposure: 180°F

Intermittent Spills: 210°F

VOC: 7 g/l

SPEED OF CURE:	50°F	70°F	90°F
Light Traffic	12-14 hrs	6-8 hrs	3-5 hrs
Full Traffic	24-36 hrs	12-16 hrs	8-10 hrs
Full Chemical Cure	5-7 days	3-5 days	1-2 days

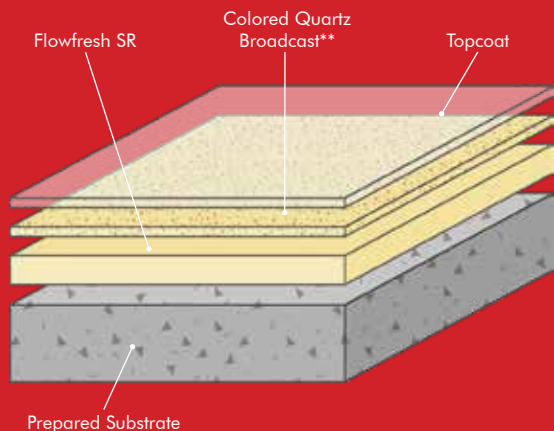

\*Temperature resistance values shown apply when using Flowcoat CR as the topcoat.  
\*\*Light colored quartz may require an additional broadcast. Consult your sales representative.

## Products Included In This System

**Unit:** 47 lb (including color pack)

### Topping:

Flowfresh SR  
24 sq ft/unit at 3/16" (yielding 1/4" finished floor)  
18 sq ft/unit at 1/4" (yielding 5/16" finished floor)

**Broadcast:\*** Colored Quartz at 1 lb/sq ft

### Topcoat Options:

Peran STC at 80 sq ft/gal  
Flowcoat CR at 80 sq ft/gal  
Flowseal Ultra EWT at 80 sq ft/gal  
Flowfast Standard Sealer at 80 sq ft/gal

### \*Flake Broadcast

An alternative effect can be created by replacing the quartz broadcast with fine 1/16" flakes.

## Installation

Installation should be carried out by a Flowcrete STAR or preferred contractor with a documented quality assurance note. Obtain details of our preferred contractor network from our customer service team or by enquiring through our website. Detailed application instructions are also available upon request.

## Substrate Requirements

Concrete or screed substrate should have a minimum of 3,000 psi compressive strength, free from laitance, dust and other contamination. The substrate should be dry to ASTM requirements and free from excessive moisture vapor transmission.

## Polygiene®

All Flowfresh systems include a built in high performance antimicrobial, Polygiene®. This silver-ion based additive inhibits the growth of bacteria and molds and guards against surface degradation and odors caused by these microorganisms. Detailed antimicrobial information and test results are available upon request.

## Color Stability

Flowfresh is not color fast and may change color over time (exhibits a yellowing effect). Color change depends on the UV light and heat levels present as such the rate of change cannot be predicted. This is more noticeable in light colors and grays, but does not compromise the product's chemical resistance or physical characteristics. Special customized colors and designs can be produced to special order.

## Technical Profile

The figures and test results shown overleaf are typical properties achieved in laboratory tests at 75°F and at 50% Relative Humidity.

## Environmental Health & Safety

The finished system is assessed as non-hazardous to health and the environment. Flowfresh systems are USDA/FDA compliant & HACCP International certified. The long service life and seamless surface reduce the need for repairs and maintenance. Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete Americas' staff and fully trained application teams.

## Aftercare, Cleaning & Maintenance

After the Flowfresh floor has been put into service, normal plant cleaning procedures may be employed. There are no effective restrictions on the method of cleaning employed. The method of cleaning should match the soil conditions and degree of sanitation required. Flowfresh flooring materials will withstand the daily use of harsh rigorous cleaning with disinfectants and detergents. Certain Flowfresh products will withstand routine cleaning by hot water wash downs up to 250°F and direct application of water-steam mix. Consult a technical representative for advice.

## Warranty

Flowcrete Americas' products are guaranteed against defective materials and manufacture and are sold subject to our standard 'Warranty, Terms and Conditions of Sale', copies of which can be obtained on request. Warranty does not cover suitability, fit for purpose or any consequential or related damages. Please review warranty in detail before installing the products.

## Disclaimer

Any recommendation or suggestion relating to the use of products manufactured by Flowcrete Americas, whether in its technical literature or in response to a specific inquiry, is based upon data believed to be reliable, however the products and information are intended for use by applicators having requisite skill and know-how in the industry and therefore it is for the applicator to satisfy itself of the suitability of the products for its own particular use and it shall be deemed that the applicator has done so at its sole discretion and risk.

[04/16/18]

Flowcrete Americas  
616 Spring Hill Drive Suite 100  
Spring TX 77386 USA  
Tel: +1 936 539 6700 Fax: +1 936 539 6701  
Email: americas@flowcrete.com



[www.flowcreteamericas.com](http://www.flowcreteamericas.com)