


KEY LASTIC CHIP 100

Technical Data Sheet

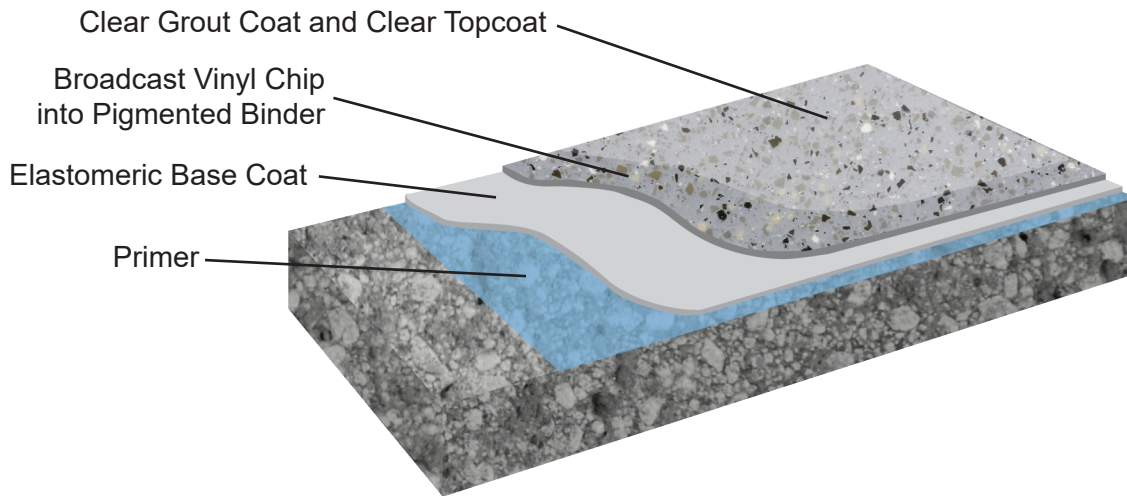

DESCRIPTION

KEY LASTIC CHIP 100 is a nominal 1/8"-3/16" resilient polymer flooring system consisting of a resilient elastomeric epoxy body coat and a polymer resin receiving coat broadcast with decorative colored chips. **KEY LASTIC CHIP 100** is finished with clear catalyst-cured coats of resin. The installed system produces a dense, sanitary finish that is designed to provide acoustical quietness and comfort under foot while minimizing bacterial growth and chemical penetration. The finish can be made non-slip resistant as required for wet areas. Polymer resin options for body coat and topcoats include epoxy, polyaspartic and urethane, depending on project requirement, consult with Key Resin for recommendations. Optional epoxy/urethane waterproofing and crack-isolation membrane available.

KEY ADVANTAGES

- Seamless, sanitary floor
- High impact and wear resistance
- Low maintenance
- Low VOC (EPA Method 24) SCAQMD Compliant
- Quiet acoustical and ergonomic environment
- Chemical resistant finish
- Decorative appearance

TYPICAL USES

- Corridors
- Lobbies
- Light manufacturing areas
- Healthcare facilities
- Labs
- Schools
- Numerous other uses-Consult with Key Resin

PHYSICAL PROPERTIES

Test Name	Method	Value
Color		Key Standard Colors Blends and Custom Blend Colors
VOC (Volatile Organic Content)	EPA Method 24	Refer to Individual Product Component Data Sheet
Adhesion to Concrete	ASTM D7234	300-400+ psi (Concrete Failure, varies by concrete strength)
Hardness, Shore D	ASTM D2240	45-50
Tensile Strength	ASTM C307	1,000 psi
Flammability	ASTM D635	Self Extinguishing
Abrasion Resistance	ASTM D4060, CS17 Wheel, 1000 cycles	30-45 mg
Impact Resistance	MIL-D-3134J	Withstands 16 ft-lbs without cracking, delamination or chipping
Resistance to Elevated Temperatures	MIL-D-3134J	No slip or flow at required temperature of 158°F
Slip Resistance	ASTM D2047	>0.6 Passes ADA recommendations

KEY LASTIC CHIP 100

Technical Data Sheet



APPLICATION

SURFACE PREPARATION

Surface Preparation is the most critical portion of any successful resinous flooring system application. All substrates must be properly prepared and tested for moisture as outlined in **Key Resin Technical Bulletin #1**. If moisture testing confirms excessive levels of moisture, apply moisture mitigation system recommended by **Key Resin**. Work must be performed by experienced contractors. The **Key Resin Technical Service Department** is available to answer any questions.

INSTALLATION

KEY LASTIC CHIP 100 material components are mixed on site. Refer to the detailed installation instructions document and **Key Resin Technical Service**.

CLEAN UP

Clean skin with soap and water. Tools and equipment should be cleaned with xylene or lacquer thinner. Consult Safety Data Sheet (SDS) for safety and health precautions.

MAINTENANCE

After completing the application of **KEY LASTIC CHIP 100**, the installer should provide the owner with maintenance instructions. **KEY LASTIC CHIP 100** is easily cleaned with neutral soaps or detergents. Routine mechanical scrubbing using the appropriate pad is recommended for all surfaces having a slip resistant texture. Refer to **Key Resin Technical Bulletins #3** and **#3-A** for additional recommendations.

WARRANTY

Key Resin Company ("Key") warrants for a period of one (1) year that its products will be free of manufacturing defects and will be in conformity with published specifications when handled, stored, mixed, and applied in accordance with recommendations of Key. If any product fails to meet this warranty, the liability of Key will be limited to replacement of any non-conforming material if notice of such non-conformity is given to Key within (1) one year of delivery of materials. Key may in its discretion refund the price received by Key in lieu of replacing the material. No customer, distributor, or representative of Key is authorized to change or modify the published specifications of this warranty in any way. No one is authorized to make oral warranties on behalf of Key. In order to obtain replacement or refund the customer must provide written notice containing full details of the non-conformity. Key reserves the right to inspect the non-conforming material prior to replacement. EXCEPT FOR THE EXPRESSED WARRANTY STATED ABOVE, THERE ARE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PURPOSE. KEY'S OBLIGATION SHALL NOT EXTEND BEYOND THE OBLIGATIONS EXPRESSLY UNDERTAKEN ABOVE AND KEY SHALL HAVE NO LIABILITY OR RESPONSIBILITY TO THE PURCHASER OR ANY THIRD PARTY FOR ANY LOSS, COST, EXPENSE, DAMAGE OR LIABILITY, WHETHER DIRECT OR INDIRECT, OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

SYSTEM OPTIONS

- Epoxy, polyaspartic, urethane chemistries available to fit the application and project requirements.
- Gloss or satin finish
- Variable slip resistance

TECHNICAL SERVICE

Key Resin Company provides services and consultations on material selection, specification, troubleshooting, and other information on the proper repair and protection of concrete surfaces. **Key Resin Sales/Technical Representatives** are available to assist. Telephone 888.943.4532 or visit www.keyresin.com.

AVAILABILITY

Key Resin materials are available throughout the United States and a number of other countries. Contact the **Key Resin Representative** in your area for details.

Rev 6/26/2020 v1.0